

IMPACDOR®

HD-175




The Aleco **ImpactDor® HD-175 by Kleerstrip®** is a rugged multi-use single piece polyethylene molded door body with corrosion resistant hinges and stainless steel mounting hardware for high performance and low maintenance.

The HD-175's attractive, rotationally molded polyethylene panels and corrosion-resistant hardware ensure minimal upkeep and maximum performance. Monolithic door panels resist moisture, chemicals, dust, bending and torque. The HD-175 features a 50% greater shell thickness than competitive models. The shell thickens towards the spine and leading edges to maintain strength and resist fatigue from cart or lift truck impacts. A steel tube strengthens and stabilizes the spine edge, plus the entire door is injected with urethane foam to add rigidity and dampen noise.



Unique 250 degree hinge

The ImpactDor® HD-175 low-wear helical hinge provides a simple, easily maintained gravity hinge design. Its precision aluminum follower travels smoothly over a wide bearing area to evenly distribute load while significantly reducing wear without problematic roller bearings. Hinge and supporting hardware are all corrosion-resistant materials.



Available Options:

- Jamb guard or combination
- Single pane 1/8" polycarbonate windows for washdown
- Molded polyethylene bumpers from 12" to 48" tall
- Choice of colors:
Cloud Gray, Charcoal Gray, Black, Chocolate, Beige, Red, White, Royal Blue



Industrial Plants

Food Processing Plants

Pharmaceutical and Medical Facilities

Retail Stores, Supermarkets and Walk-In Coolers

Features:

- 1-3/4" (44mm) insulated door panels act as effective sound and thermal barriers
- One-piece molded polyethylene shell resists penetration by moisture, dust and chemicals
- 50% more shell thickness at impact areas than comparable doors
- Unique corrosion resistant helix hinge allows for up to 125 degrees swing in both directions
- Stainless steel mounting hardware
- Industrial grade steel bracing the length of the door's spine

KLEERSTRIP®

2802 East Avalon Avenue
Muscle Shoals, AL 35661-3748
Phone / (800) 599-7004 • (256) 248-2587
Fax / (800) 942-3397 • (256) 248-2588
Email / info@kleerstrip.com

www.kleerstrip.com

Kleerstrip Order Number: _____

Date: ____ / ____ / ____

KLEERSTRIP®

IMPACDOR® HD-175

Specifications: 1 3/4" Insulated, Cross-Rotationally Molded

Account Number: _____

Sold To: _____

Address: _____

Purchase Order #: _____

Ship To: _____

Address: _____

Special Markings/Instructions: _____

Quantity: _____ Single/Bi-Parting

Net Opening: _____" Wide _____" High

COLOR SELECTION (Circle one)

Cloud Gray, Charcoal Gray, Black, Chocolate, Beige, Red, White, Royal Blue

DOOR FEATURES & OPTIONS

SPRING BUMPERS		IMPACT PANELS
24" Wide	42" Wide	
[]	[] 12" High	_____ " High
[]	[] 18" High	
[]	[] 24" High	
[]	[] 36" High	
[]	[] 42" High	
[]	[] 48" High	

WINDOW SIZES (DUAL PANE)

14" x 22" Door Panels less than 36" wide
18" x 22" Door Panels 36" wide and over

LOWER HINGE

8 3/4" High Stainless Steel Jamb Guard is Standard with Helix Hinge.

SEALS

Full Perimeter Air Seal is Standard


HINGE

Helix Hinge is Standard

JAMB CONSTRUCTION

Helix hinge requires a minimum double 2x4 wood jamb.

Kleerstrip Part Number: _____

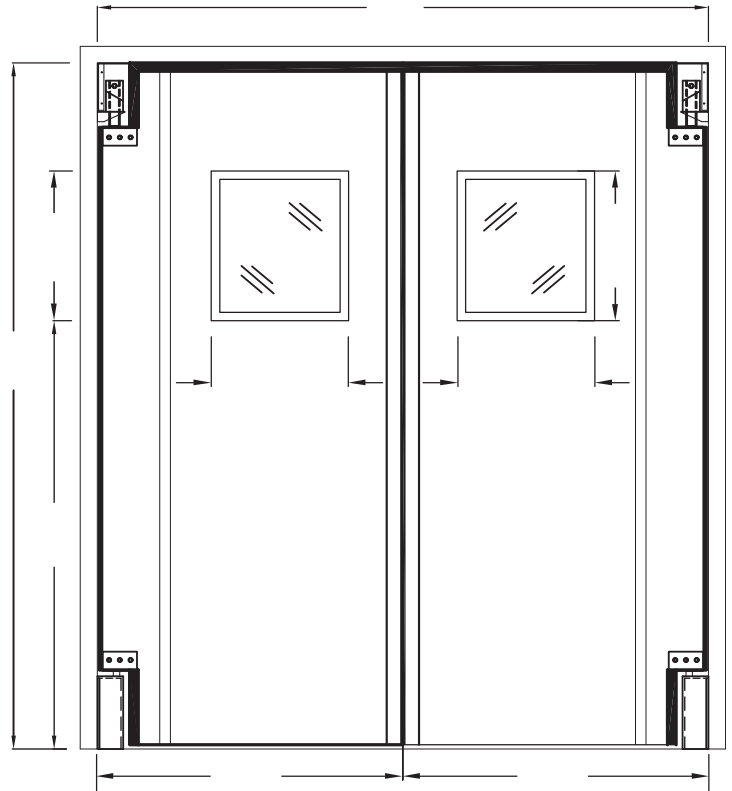

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

4 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Approved: _____ Date: _____

Company Name: _____ Phone: _____