

IMPACDOR®

SUPRA

The Aleco **Supra ImpacDor® by Kleerstrip®** is a flexible panel PVC door designed for heavy-duty use and maximum visibility. With a full crystal clear panel for maximum safety, the Supra ImpacDor® is ideal for high traffic volume heavy-duty forklift, pallet jack, pushcart and pedestrian use.

Engineered for heavy-duty use

The Supra is designed for the most demanding commercial, industrial and food processing applications where built-in durability is required. Tough wear resistant .394" thick crystal clear flexible PVC panels absorb the initial impact of loads passing through the Supra door. Supra PVC panels are easy to clean and maintain and can be inexpensively replaced when necessary. Also available in Low Temperature formulation for freezers.

Durable, maintenance-free, and easy to install

The Supra features galvanized steel hinges for corrosion resistance. The Supra's upper and lower mounting brackets are low profile thus out of the way of impact collision damage. Ninety percent of the Supra's weight rests on the floor so no special jamb reinforcement is necessary.

Adjustable closing mechanism

The adjustable torsion spring closing mechanism allows the



Frame not included

Supra to swing on an even plane and can be adjusted to compensate for wind or negative pressure conditions. Panels overlap in the center 3" for better sealing.

Custom made to exact size

The Supra ImpacDor® may be custom made to suit your application for opening sizes up to 10' x 10'. Transoms (strip curtains) are available for openings higher than 10'.

Industrial Plants

Food Processing Plants

Pharmaceutical and Medical Facilities

Retail Stores

Features:

- Crystal clear PVC, .394" thick panels
- Unrestricted visibility
- Designed for heavy-duty industrial, commercial and food processing traffic
- Adjustable torsion spring closing mechanism assures 180° swing capability on an even plane
- Lower threaded adjuster makes for quick and easy installation and alignment
- Finished panels may be field modified by as much as 4" in height and 5" in width. Custom sizes available.

KLEERSTRIP®

2802 East Avalon Avenue
Muscle Shoals, AL 35661-3748
Phone / (800) 599-7004 • (256) 248-2587
Fax / (800) 942-3397 • (256) 248-2588
Email / info@kleerstrip.com

www.kleerstrip.com

Kleerstrip Order Number: _____

Date: ____ / ____ / ____

KLEERSTRIP®

IMPACDOR® SUPRA

Specifications: 3/8" flexible PVC, clear

Account Number: _____

Sold To: _____

Address: _____

Purchase Order #: _____

Ship To: _____

Address: _____

Special Markings/Instructions: _____

Quantity: _____ Single Bi-Parting

Net Opening: _____" Wide X _____" High

DOOR FEATURES & OPTIONS

PANEL

3/8" crystal clear PVC

FORMULATION

[] Standard (indoor/outdoor)

[] Low-Temp

HINGE

Galvanized full-length vertical frame of 13 or 11 gauge wall thickness (depending on overall door size)

CLOSING MECHANISM

Adjustable torsion spring. Swings on even plane 180°.


FIELD MODIFY

Up to 2" in height and 4" in width.

CUSTOM SIZES

Consult factory.

Kleerstrip Part Number: _____

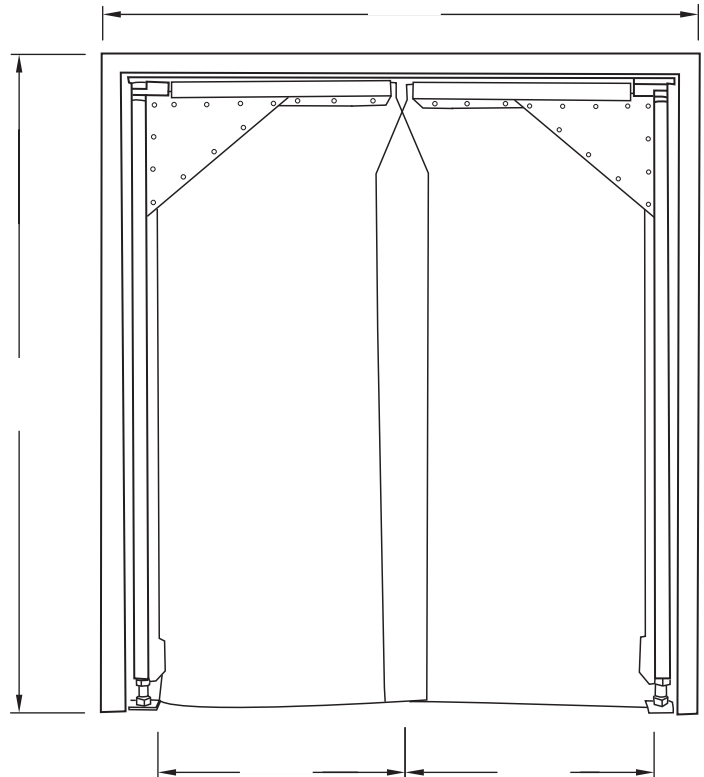

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

6.5 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Approved: _____ Date: _____

Company Name: _____ Phone: _____